





PERFORMANCE THAT'S OVER THE TOP

The **Select** Series Snowblowers are built to get your work off the ground with durable performance, high capacity design, with a range of models from 15 HP compact tractors to 125 HP farm tractors available.

Chute Rotation - **Select** Snowblowers get the snow out of your way and put it where you want it. Our chute rotators come in manual or our new bolt on hydraulic.

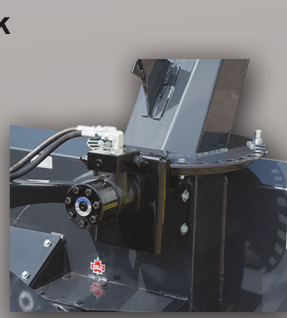


Hydraulic Rotation

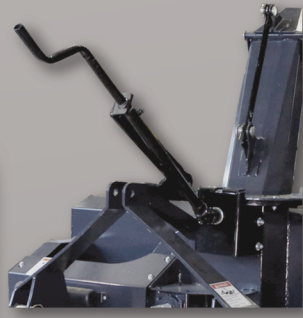

Manual Rotation

*PTO powered models shown

1000 RPM KIT

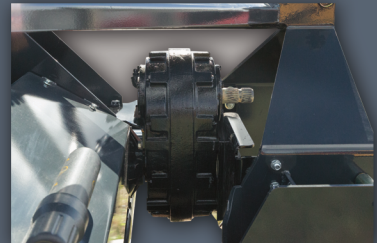

Available on the 97 and 108 models, a kit is available to allow larger tractors to run at 1000 RPM PTO. The 1000 RPM Kit also raises the input shaft to allow the PTO shaft to run at a lesser angle on larger tractors increasing the efficiency and life of the driveline components.



PTO Snowblower Series

	SEL54	SEL60	SEL68	SEL75	SEL87S	SEL87D	SEL97S	SEL97D	SEL108D
Skid Shoes	3/8 x 1-1/2 Weld-on	3/8 x 1-1/2 Weld-on	3/8 x 1-1/2 Weld-on	3/8 x 1-1/2 Weld-on	3/8 x 1-1/2 Weld-on	3/8 x 1-1/2 Weld-on	3/8 x 1-1/2 Weld-on	1/2 x 2 Weld-on	1/2 x 2 Weld-on
Cutting Edge	3/8 x 1	3/8 x 1	3/8 x 1-1/2	3/8 x 2	3/8 x 3	3/8 x 3	3/8 x 3	1/2 x 6 Bolt On	1/2 x 6 Bolt On
Cutting Width	54"	60"	68"	75"	87"	87"	97"	97"	108"
Auger Tube	2-3/8" OD	2-3/8" OD	2-3/8" OD	3-1/2" OD	3-1/2" OD	3-1/2" OD	3-1/2" OD	4-1/2" OD Heavy Wall	4-1/2" OD Heavy wall
Auger Flighting	1/4 x 2-1/4	1/4 x 2-1/4	1/4 x 2-1/4	1/4 x 2-1/4	5/16 x 2-1/4	1/4 x 2-1/4	5/16 x 2-1/4	5/16 x 2-1/4	5/16 x 2-1/4
Auger Diam	14"	14"	14"	15"	19"	15" (x2)	19"	19" (x1) and 15" (x1)	19" (x1) and 15" (x1)
Recommended HP	15	20	35	50	60	60	75	100	125
Roller Chain	#50	#50	#60 heavy	#60 heavy	#60 heavy	#60 heavy	#60 heavy	#80	#80
3PH Category	Cat. 1 & Quick Attach	Cat. 1 & Quick Attach	Cat.1 & Quick Attach	Cat. 1, Cat. 2 & Quick Attach	Cat. 2 & Quick Attach	Cat. 2 & Quick Attach	Cat. 2 & Quick Attach	Cat. 2, 3 & Quick Attach	Cat. 2, 3 & Quick Attach
Chute Rotation	Manual or Hydraulic (opt)	Manual or Hydraulic (opt)	Manual or Hydraulic (opt)	Manual or Hydraulic (opt)	Manual or Hydraulic (opt)	Manual or Hydraulic (opt)	Manual or Hydraulic (opt)	Manual or Hydraulic	Manual or Hydraulic
Chute Diameter	8"	8"	10"	10"	12"	12"	12"	13"	13"
Main Body Height	22"	22"	25"	29"	32"	36"	32"	39"	39"
Chute Deflector	Manual Adj.	Manual Adj.	Manual Adj. or Hydraulic (opt)	Manual Adj. or Hydraulic (opt)	Manual Adj. or Hydraulic (opt)	Manual Adj. or Hydraulic (opt)	Manual Adj. or Hydraulic (opt)	Manual Adj. or Hydraulic (opt)	Manual Adj. or Hydraulic (opt)
Fan Diameter	21"	21"	21"	23"	26"	26"	26"	32"	32"
Fan Depth	6"	6"	7"	8"	10"	10"	10"	12"	12"
Auger Drive Shaft	1"	1"	1-1/4"	1-1/4"	1-1/4"	1-1/4"	1-1/4"	1-3/4"	1-3/4"
Fan Output Shaft	1-1/4"	1-1/4"	1-3/8"	40mm	40mm	40mm	40mm	2"	2"
Weight	366 lbs.	396 lbs.	506 lbs.	748 lbs.	1034 lbs.	1161 lbs.	1106 lbs.	1900 lbs.	1980 lbs.

